



Rugged Design
Professional Quality
Proven Performance
Economically Priced

**The Profitable Source
for Finishing Products**

Gfp 800DH Series

Professional Dual Heat Laminators

For finishing professionals who need versatility, quality, and economy in one machine, the Gfp 800 Series delivers. Turn out thermal encapsulation with low melt films (1.5-10mil), PSA lamination, and mounting jobs quickly and easily.

800DH Series

ULTIMATE FLEXIBILITY

Dual heat for thermal & cold apps

PROFESSIONAL FEATURES

Produce Professional results

FAST ROLL CHANGES

Front/Rear Swing-out shafts

EASY LOADING

3" Quick-Grip Swing-out Shafts

INDUSTRIAL DESIGN

Years of maintenance-free service




laminating • mounting • encapsulating

Our most flexible, cost-effective laminator yet

Spend less time on set-ups and changeovers with swing-out Quick-Grip supply shafts. Two front rewind shafts allow thermal encapsulation of prints from a roll.



- **Labor saving swing-out 3" Quick-Grip supply shafts**
- **Photoelectric eye for operator safety**
- **Independent top and bottom heaters**
- **Web clutch adjustment for output quality**
- **Optional motorized rear rewind**
- **Swing up feed table and 38" output height**

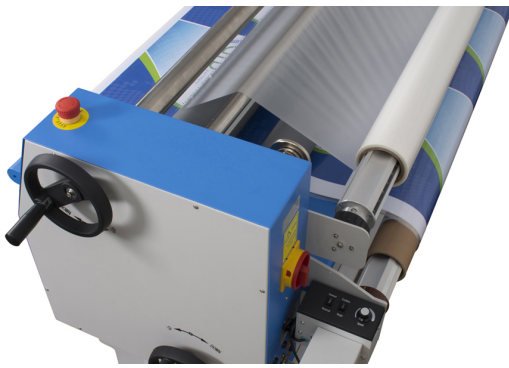

Motorized rear rewind
for roll-to-roll
applications

Front and rear swing-
out film shafts for
easy loading



APPLICATIONS

Signs
Posters
POP Displays
Trade show displays
Dry-erase boards
Graphic mounting
Photo mounting
Floor graphics
Window graphics
Vehicle graphics

cTUVus
Safety
Approval



Warranty:

1 year parts & labor.
Installation is included.

847DH-1

865DH-1

Laminating Width	47"	65"
Roller Diameter	5"	
Roller Gap	1"	
Main rollers	Silicone	
Supply roll diameter(max)	16" bottom, 8" top	
Film shafts	3" aluminum Quick-Grip	
Rear rewind	Optional	
Max. temperature	266°F	
Heat method	Quartz heater	
Film thickness	1.5 - 10mil	
Laminating speed	0-13 ft/min	
Drive motor	DC geared motor	
Pressure Adjustment	Dual hand wheels	
Roller heating	Top & Bottom	
Power Supply	Single phase 19A 220v 60HZ	Single phase 24A
Power Consumption	Max. 4400W	Max. 5700W
Net Weight w/ stand	601 lbs.	767 lbs.
Dimensions	69" x 34" x 49"	87" x 34" x 49"
Machine shipping	685 lbs. 77" x 38" x 33"	893 lbs. 90 x 38" x 33"
Stand shipping	115 lbs. 61" x 33" x 15"	134 lbs. 79 x 33" x 15"

Your local dealer is:

