



IT'S AS EASY AS 1, 2, 3, 4.

# QWIKMOD SERIES

1

## BRIGHTER

- New and improved lumen output range of 118-270 LM/ft



2

## EASY TO USE

- Qwik Release Tab
- Smart Packaging: One Bag, One Power Supply
- 4 modules for any sign



3

## PERFORMANCE & RELIABILITY


- Integrated aluminum heatsink
- Waterproof IP68
- Diamondback 170° Optic Lens
- Low-Profile Design



4

## COST EFFECTIVE

- Most cost-effective module family in the industry




### RECOMMENDED COVERAGE CHART

Depth	Max. Stroke	Row Spacing	Product	
			Single Row	Multi-Rows O.C.
			True White	Colors
2"	6"	2" at 6 mods/ft.	QM1	
3"	8"	4" at 3 mods/ft.	QM1/QM2/QM3/QM4	QM2/QM3
4"	12"	7"	QM1	
4"	12"	7" at 2 mods/ft.	QM2/QM3/QM4	QM2/QM3
5"	16"	10"	QM2/QM3/QM4	QM2/QM3
6"	18"	10"	QM2	QM2
6"	18"	12"	QM3/QM4	QM3
7"	22"	12"	QM3	
7"	22"	14"	QM4	
8"	24"	18"	QM4	

Note: Product and depth may vary depending on face material and desired brightness.



Qwik Release Tab reduces labor time




# Qwik Mod™ Series

Better coverage with a wider optic – accomplish more with our NEW Qwik Mod™ Series.

## SPECIFICATIONS

Beam Angle	170° Ultra-Wide Low Dome Batwing Optic with Diamondback Optic Lens Technology
Certifications	UL & cUL Recognized (SAM Manual), CE, RoHs
Dimensions	QM1: 0.69"W x 1.4"L x 0.25"H
	QM2: 0.69"W x 2.2"L x 0.25"H
	QM3: 0.69"W x 3.14"L x 0.25"H
	QM4: 1.7"W x 1.77"L x 0.25"H
Fastening	Peel & Stick / Mechanical Screw Hole
Input	12VDC
Operating Temp	-30° to +60°C
Packaging	QM1: 150 mods (60 ft.) per bag or 1500 mods (600 ft.) per case
	QM2: 76 mods (44.7 ft.) per bag or 912 mods (536.52 ft.) per case
	QM3: 50 mods (33.3 ft.) per bag or 750 mods (500 ft.) per case
	QM4: 38 mods (25.3 ft.) per bag or 912 mods (608 ft.) per case
Power Supply	P-LED 12VDC
Protection Grade	IP68
Spacing	QM1: 2.5 mods/ft. (fully stretched)
	QM2: 1.7 mods/ft. (fully stretched)
	QM3 and QM4: 1.5 mods/ft. (fully stretched)
Warranty	10-Year Product / 5-Year Limited Labor

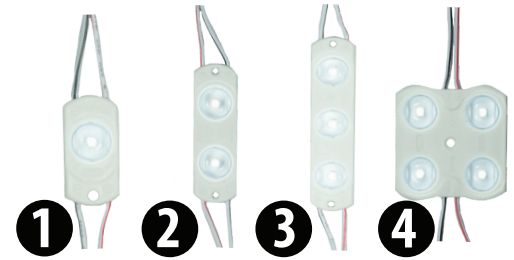

## FEATURES

- Diamondback 170° Optic Lens
- Integrated aluminum heat sink
- Waterproof IP68
- Snap & Peel Qwik Release Tab
- Four different mod styles to perform in a wide variety of sign applications
- More light diffusion with a wider batwing resulting in better coverage

## WIRING DETAILS


White Solid	Positive
White/Black Stripe	Negative

Check module for polarity.

## POWER SUPPLY OPTIONS

Power Supply	60W		36W		20W		12W	
	Watts/Mod	Max Mods	Watts/Mod	Max Mods	Watts/Mod	Max Mods	Watts/Mod	Max Mods
QM1	0.4	150	0.41	87	0.42	47	0.44	27
QM2	0.8	76	0.81	44	0.84	23	0.88	13
QM3	1.2	50	1.22	29	1.26	15	1.32	9
QM4	1.6	38	1.62	22	1.68	11	1.76	6

Watts per mod may vary depending on run footage.



## QWIK MOD™ 1

### PRODUCT OPTIONS

Color	Efficacy	Intensity	Max Mods (Series)	UL Part Number	Ordering Part Number
4100K*	118 LM/W	47.2 LM/mod (118 LM/ft.)	75 mods (30 ft.)	PL-QM1-MW110-P	M-QMSX0-41
5000K	118 LM/W	47.2 LM/mod (118 LM/ft.)	75 mods (30 ft.)	PL-QM1-NW110-P	M-QMSX0-50
7100K	118 LM/W	47.2 LM/mod (118 LM/ft.)	75 mods (30 ft.)	PL-QM1-TW110-P	M-QMSX0-71

\*Available in limited supply

## QWIK MOD™ 2

### PRODUCT OPTIONS

Color	Efficacy	Intensity	Max Mods (Series)	UL Part Number	Ordering Part Number
2700K		COMING SOON		PL-QM2-IW150-P	M-QMDX0-27
3000K	118 LM/W	94.1 LM/mod (160 LM/ft.)	38 mods (22.35 ft.)	PL-QM2-DW150-P	M-QMDX0-30
3500K*	118 LM/W	94.1 LM/mod (160 LM/ft.)	38 mods (22.35 ft.)	PL-QM2-WW150-P	M-QMDX0-35
4100K*	118 LM/W	94.1 LM/mod (160 LM/ft.)	38 mods (22.35 ft.)	PL-QM2-MW150-P	M-QMDX0-41
5000K	118 LM/W	94.1 LM/mod (160 LM/ft.)	38 mods (22.35 ft.)	PL-QM2-NW150-P	M-QMDX0-50
5700K*	118 LM/W	94.1 LM/mod (160 LM/ft.)	38 mods (22.35 ft.)	PL-QM2-WN150-P	M-QMDX0-57
7100K	118 LM/W	94.1 LM/mod (160 LM/ft.)	38 mods (22.35 ft.)	PL-QM2-TW150-P	M-QMDX0-71

\*Available in limited supply

## QWIK MOD™ 3

### PRODUCT OPTIONS

Color	Efficacy	Intensity	Max Mods (Series)	UL Part Number	Ordering Part Number
4100K*	114 LM/W	136.7 LM/mod (205 LM/ft.)	25 mods (16.67 ft.)	PL-QM3-MW200-P	M-QMTX0-41
5000K	114 LM/W	136.7 LM/mod (205 LM/ft.)	25 mods (16.67 ft.)	PL-QM3-NW200-P	M-QMTX0-50
7100K	114 LM/W	136.7 LM/mod (205 LM/ft.)	25 mods (16.67 ft.)	PL-QM3-TW200-P	M-QMTX0-71

\*Available in limited supply

## QWIK MOD™ 4

### PRODUCT OPTIONS

Color	Efficacy	Intensity	Max Mods (Series)	UL Part Number	Ordering Part Number
4100K*	113 LM/W	180 LM/mod ( 270 LM/ft.)	19 mods (12.67 ft.)	PL-QM4-MW260-P	M-QMQX0-41
5000K	113 LM/W	180 LM/mod ( 270 LM/ft.)	19 mods (12.67 ft.)	PL-QM4-NW260-P	M-QMQX0-50
7100K	113 LM/W	180 LM/mod ( 270 LM/ft.)	19 mods (12.67 ft.)	PL-QM4-TW260-P	M-QMQX0-71

\*Available in limited supply

