


CONVERD



conVerd Board™
rigid paper board

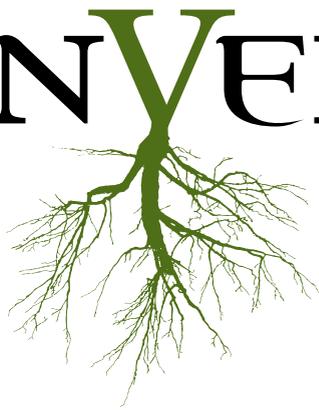

conVerd Board™ is a paper based, rigid, environmentally responsible, and fully recyclable alternative for structural signage in the wide format marketplace.

conVerd Board™ offers a bright white dimensionally stable and rigid surface for indoor and short term outdoor point-of-purchase and signage applications.

The product incorporates 10% post consumer waste to achieve maximum sustainability without sacrificing the print quality or surface characteristics required for critical POP applications.

Unlike low quality boards made of bleached OCC (old corrugated cardboard) that will warp and compromise the look of your signage, this board is moisture-resistant and maintains superior stability during typical changes in temperature and humidity that tend to affect other rigid medias.

Printability: Flatbed UV and screen

Choose your GREEN resource from a leading solutions provider.

APPLICATIONS

Hanging signage	Trade show signage
Indoor POP	Displays
Menu boards	Wing Cards
StandeEs	Danglers
Window signs	Custom package

CUTTING RECOMMENDATIONS

conVerd Board is designed to be easily cut using a die, guillotine, and many other market CNC routers using i-cut.

EASY TO INSTALL

Use with grommet, frames, easel backs, double-sided tape, Velcro® or suction cups. Suitable for framing because it is acid free.



conVerd Board™

rigid paper board



Technical Data				
Thickness	Basis Weight (lb/MSF)	Flexural Rigidity (in/lb)	Edge Crush (in/lb)	Brightness
1.5mm / 1/16"	115	25.5 MD / 20.4 CD	53.5+	98+
3.0mm / 1/8"	180	49 MD / 36 CD	170+	98+
3.5mm / 1/6"	235	70 MD / 50 CD	225+	98+
4.7mm / 3/16"	250	75 MD / 55 CD	200+	98+
6.0mm / 1/4"	280	75 MD / 55 CD	200+	98+

These are typical values of the product as produced representing a manufacturing range.
Slight variations may occur during the manufacturing process.

Available Sizes					
	1.5mm	3.0mm	3.5mm	4.7mm	6.0mm
48" x 96" / 1.22m x 2.44m	X	X	X	X	X
60" x 120" / 1.52m x 3.05m)		X	X		X
63" x 123" / 1.60m x 3.12m		X	X		X

Quantity		
	Full Skids	Cartons
1.5mm	600	50
3.0mm	325	25
3.5mm	300	25
4.7mm	250	25
6.0mm	200	25



conVerd – a FiberMark North America Brand
70 Front Street, West Springfield, MA 01089
US & CANADA: 888-977-5050 INTERNATIONAL: 413-533-0338
converd@fibermark.com





conVerd Board®

Handling Instructions

Media Storage

Do not store product directly on floor for prolonged periods, this will increase the possibility of moisture absorption, rather store product on pallets, shelves, or in cabinets. Store product in areas protected from extreme temperature and humidity. Do not open sealed packages until ready for use.

Leave product in original packaging. The packaging contains stretch wrap to protect the product from moisture. Removing the stretch wrap eliminates the protective barrier and, depending on the environment, can result in either absorption or loss of moisture. In time, these changes in moisture could result in quality issues including deformation such as curl, waviness, and tight edges.

Stacking

Place cartons carefully on top of one another to avoid crushing edges or causing other damage.

Never stack pallets on top of one another without the plywood tops included in the original shipment packaging.

Temperature

The temperature of the room where the product is stored can impact performance; optimum storage temperature is 68 to 76 degrees F (20 to 25 C).

Humidity

Desired storage conditions are in areas with an relative humidity of 35% to 55%. Exposure to a prolonged increase in humidity can cause this or any print media to develop curl or waviness that might impact aesthetics and functionality. When a significant decrease in humidity occurs, the product can dry out resulting in similar issues.

Climate Conditioning

This product requires conditioning before printing. Place product in print area, remove all stretch wrap, and allow product to acclimate for 24 to 48 hours before printing. Do not remove banding or plywood top until product has acclimated for 24 to 48 hours in the print area. This will allow the product to adapt to the printing environment. After 24 to 48 hours remove all remaining packaging, if entire product is not used, then the carton top and plywood should be replaced for storage and future conditioning.



conVerd - a FiberMark North America Brand
70 Front Street, West Springfield, MA 01089
US & CANADA: 888-977-5050 INTERNATIONAL: 413-533-0338
converd@fibermark.com

www.fibermark.com
11192014



Manufactured
With
Recycled Fiber

MADE IN THE USA



The mark of
responsible forestry