

QUATTRO



170°
OPTICS



CORE APPLICATIONS:

CHANNEL LETTERS

> WIDE | DEEP

CABINET / BOX SIGNS

> STANDARD | CLOUD

ACCENT & COVE LIGHTING



THE 24V POWERHOUSE

- L70 5+ years LIFESPAN**
- 7P/7L WARRANTY**
- IP67 DRY / DAMP / WET**
- 40° ~ 140° OPERATING TEMPERATURE**
- TOTAL SYSTEM**
- MECHANICAL FASTENING**
- EASY PEEL 3M VHB LINER**
- CCT RANGE SINGLE BIN**
- TRU CONSTANT CURRENT**

Technical Specifications

| Product Code | Temps / Colors | Lumen per Mod | Efficiency | Lumens Per Foot | Modules Per Foot | Power per Module / Foot | # Mods / Feet Per 100w Power Supply | Max. Serial Connection | Mods/Feet Per Bag |
|----------------|----------------|---------------|------------|-----------------|------------------|-------------------------|-------------------------------------|------------------------|----------------------|
| U4.24V1.2W7.1K | 7100K | 184 | 153 Lm/W | 276 | 1.5 | 1.2 W {1.80 W ft.} | 80 Mods {53 feet} | 40 mods {26 feet} | 80 Mods {53 feet} |
| U4.24V1.2W6.5K | 6500K | 184 | 153 Lm/W | 276 | 1.5 | | | | |
| U4.24V1.2W4.0K | 4000K | 184 | 153 Lm/W | 276 | 1.5 | | | | |
| U4.24V1.2W3.0K | 3000K | 184 | 153 Lm/W | 276 | 1.5 | | | | |


Note: Custom Kelvin Temperatures Available Upon Request

Spacing & Usage Chart


| Channel / Sign Depth | 3" | 4" | 5" | 6" |
|---------------------------------|-----|-----|-----|-----|
| Single Row Spacing - Max Stroke | 10" | 12" | 14" | 14" |
| Multiple Row Spacing | 8" | 10" | 12" | 12" |

Note: Product and depth may vary depending on face material and desired brightness. Testing conducted using 7328 acrylic

Light Beam Pattern

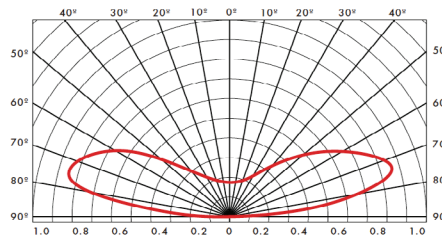

170° Lens

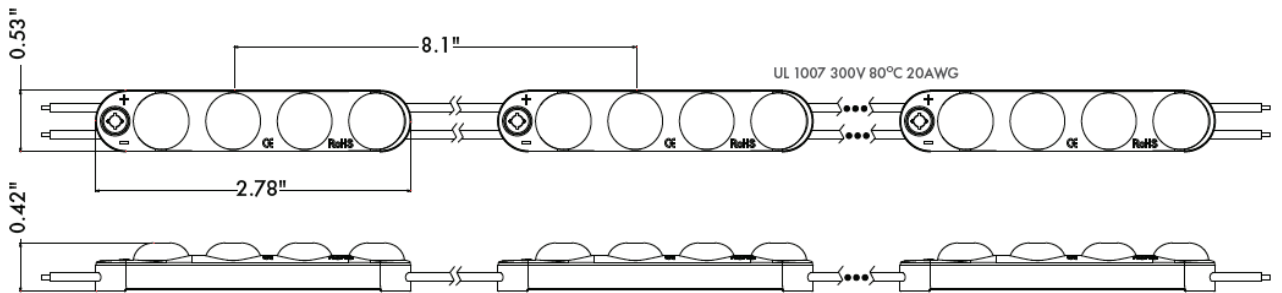

800.253.1569 | wensco.com