

TRIO



170°
OPTICS



CORE APPLICATIONS:

CHANNEL LETTERS

> STANDARD | SHALLOW | WIDE | DEEP

CABINET / BOX SIGNS

> STANDARD | SHALLOW | CLOUD

ACCENT & COVE LIGHTING

THE DUO'S BIG BROTHER

- L 70**
5+
years
LIFESPAN
- 7P / 7L**
WARRANTY
- IP67**
DRY / DAMP / WET
- 40° ~ 140°**
OPERATING
TEMPERATURE
- TOTAL SYSTEM**
\$
- MECHANICAL**
FASTENING
- EASY PEEL**
3M
VHB
LINER
- CCT RANGE**
SINGLE BIN
- TRU**
CONSTANT
CURRENT

Technical Specifications

Product Code	Temps / Colors	Lumen per Mod	Efficiency	Lumens Per Foot	Modules Per Foot	Power per Module / Foot	# Mods / Feet Per 60w Power Supply	Max. Serial Connection	Mods/Feet Per Bag
U3-12V.96W7.1K	7100K	148	154 Lm/W	222	1.5	0.96 W {1.44 W ft.}	60 Mods {40 feet}	25 mods {16 feet}	50 Mods {33 feet}
U3-12V.96W6.5K	6500K	148	154 Lm/W	222	1.5				
U3-12V.96W4.0K	4000K	148	154 Lm/W	222	1.5				
U3-12V.96W3.0K	3000K	148	154 Lm/W	222	1.5				


Note: Custom Kelvin Temperatures Available Upon Request

Spacing & Usage Chart


Channel / Sign Depth	2"	3"	4"	5"
Single Row Spacing - Max Stroke	N/A	10"	12"	14"
Multiple Row Spacing	N/A	9"	11"	13"

Note: Product and depth may vary depending on face material and desired brightness. Testing conducted using 7328 acrylic

Light Beam Pattern

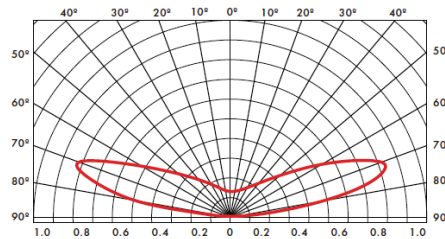

170° Lens

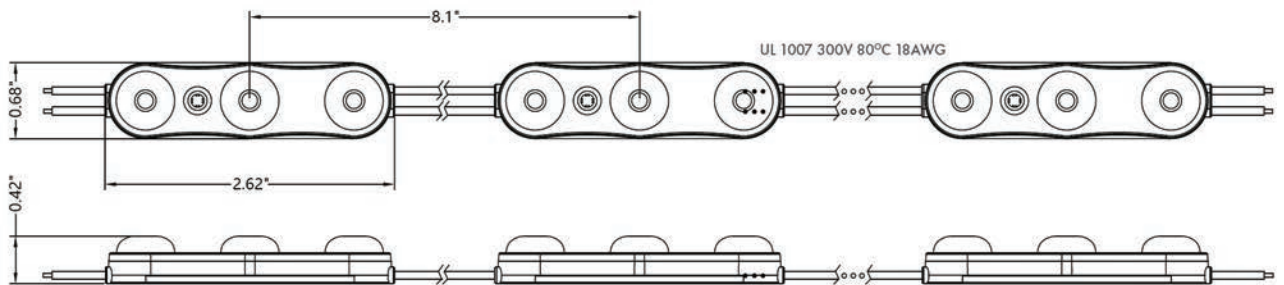

800.253.1569 | wensco.com