

AnPro 180 Plus

The Future Is Here


Specifications

Viewing Angle	178° Optics
Input Voltage	24VDC
Watts	1.2w/mod (1.8w/ft.)
Modules/Foot	1.5Mods/ft. fully stretched
Model	Anpro 180 Plus
Protection Grade	IP67
Packaging	40pcs/chain, 80pcs/bag 10 bags/outer carton
Warranty	7 Year (Product) / 5 Year (Labor)
Operating Temp.	-40° ~ +60 °C / -40° ~ +140 °F
Storage Temp.	-40° ~ -70 °C / -40° ~ +158 °F
Cascade	25 mods single-ended power feed 50 mods double-ended power feed


Options

Model	Color Temp	Lumens
Anpro180 Plus 7500K	7500K	199.2lm/mod (166lm/w)
Anpro180 Plus 6300K	6300K	194.2lm/mod (161.8lm/w)
Anpro180 Plus 5000K	5000K	190.2lm/mod (158.5lm/w)

Drawings

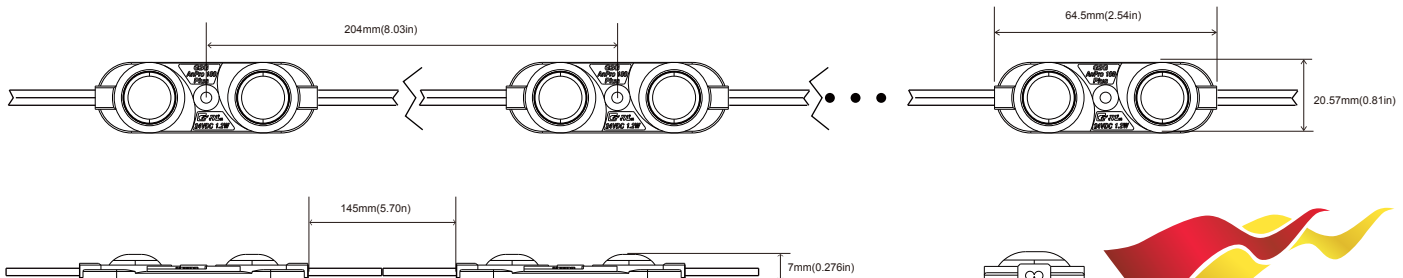

166lm/w



Benefits

- Quick Installation System(QIS) enabled.
- Designed for Small to large Channel letters.
- UV and IR Protected
- L80 rating of 50,000 hours
- 3M double face tape and mechanical mounting options.

